



2200K

LUZ

DIFUSION

2200K

Colección de productos lumínicos básicos para exterior en temperatura 2200K. Su apariencia se caracteriza por un resplandor muy cálido, como el de una vela. 2200K es el punto más bajo de la escala de luz blanca.

Las aplicaciones más habituales son centros históricos, parques e iluminación de terrazas. También muy útil para reducir la contaminación lumínica nocturna debido a su cualidad muy atmosférica y agradable a la vista.

A collection of basic outdoor lighting products in 2200K, characterized by a very warm, candle-like glow. 2200K is the lowest point on the white light scale.
Common applications include historic centers, parks, and patio lighting. It is also very useful for reducing nighttime light pollution due to its atmospheric and pleasing quality.

LUZ

DIFUSION



W1




U1



U5



U4



U2



U5



U6



U7

U1

2200K




ref. U1
Negro/Black
2200K
LED 3W
Ø50x80mm
IP66
CRI80+
220-240V

W1

2200K

ref. W1
Negro/Black
2200K
LED 3W
Ø82mm
Ø65mm (cut out)
IP65
CRI80+
220-240V

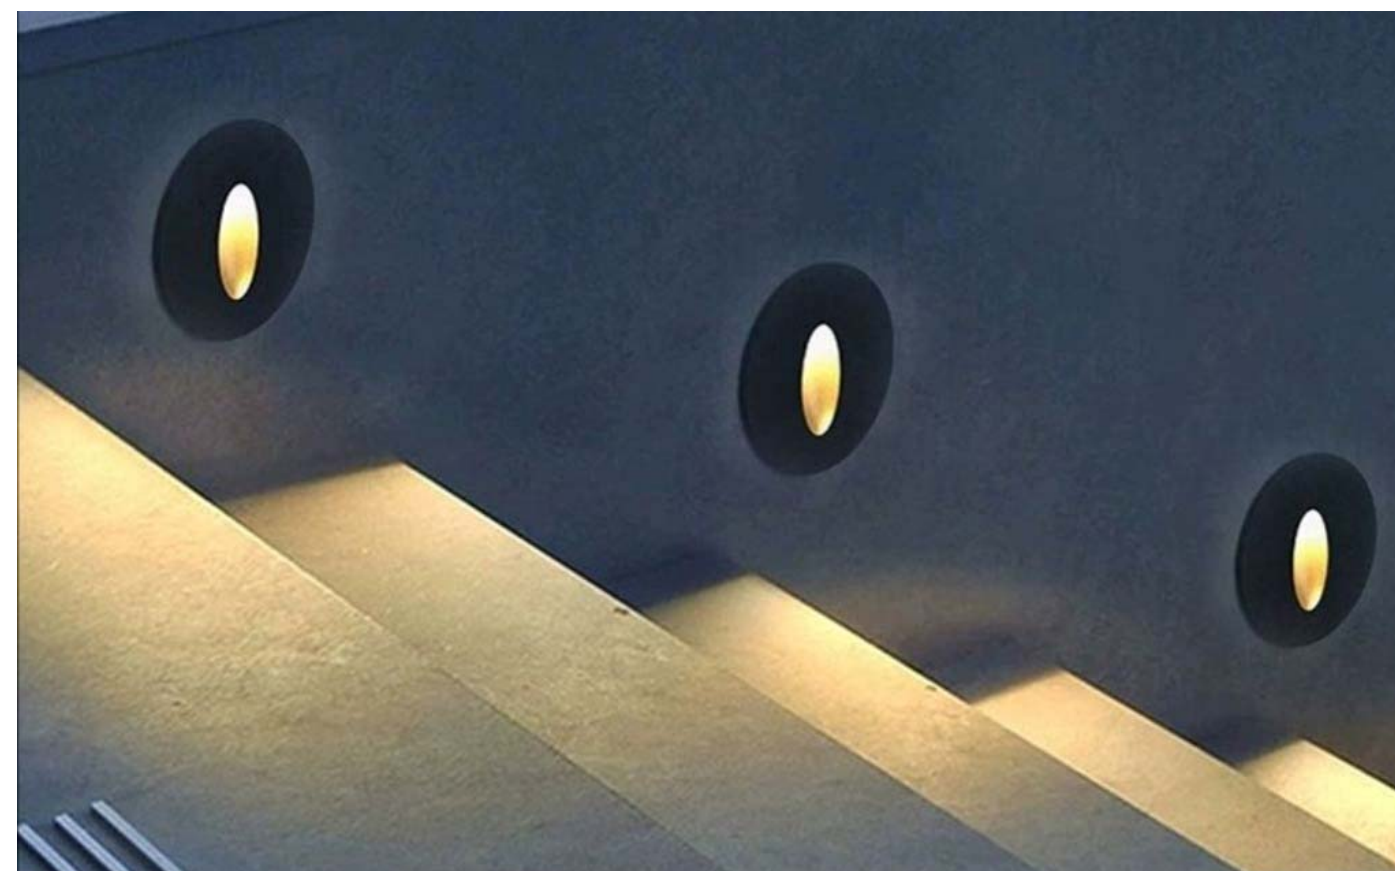

U2

2200K

ref. U2

Acero inoxidable/

Stainless steel

2200K

LED 15W Ø100mm;

90mm (cut out)

IP67

CRI80+

220-240V



U4

2200K

ref. U4

Acero inoxidable/Stainless steel



2200K

LED 1W

Ø35mm; Ø29mm (cut out) IP67

CRI80+

220-240V

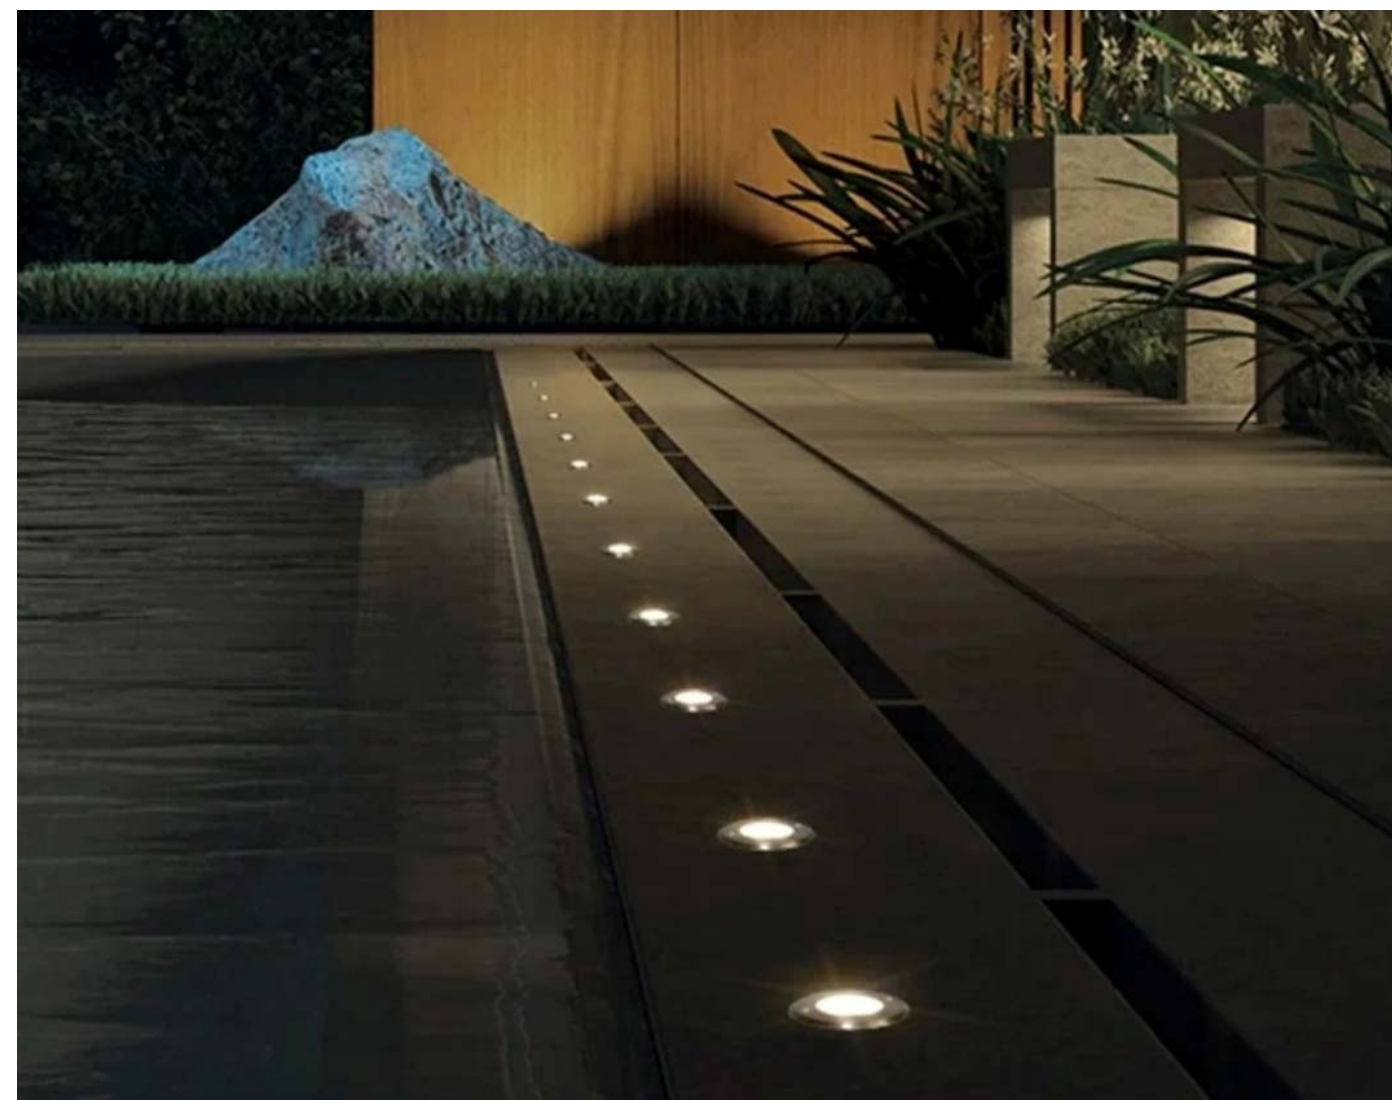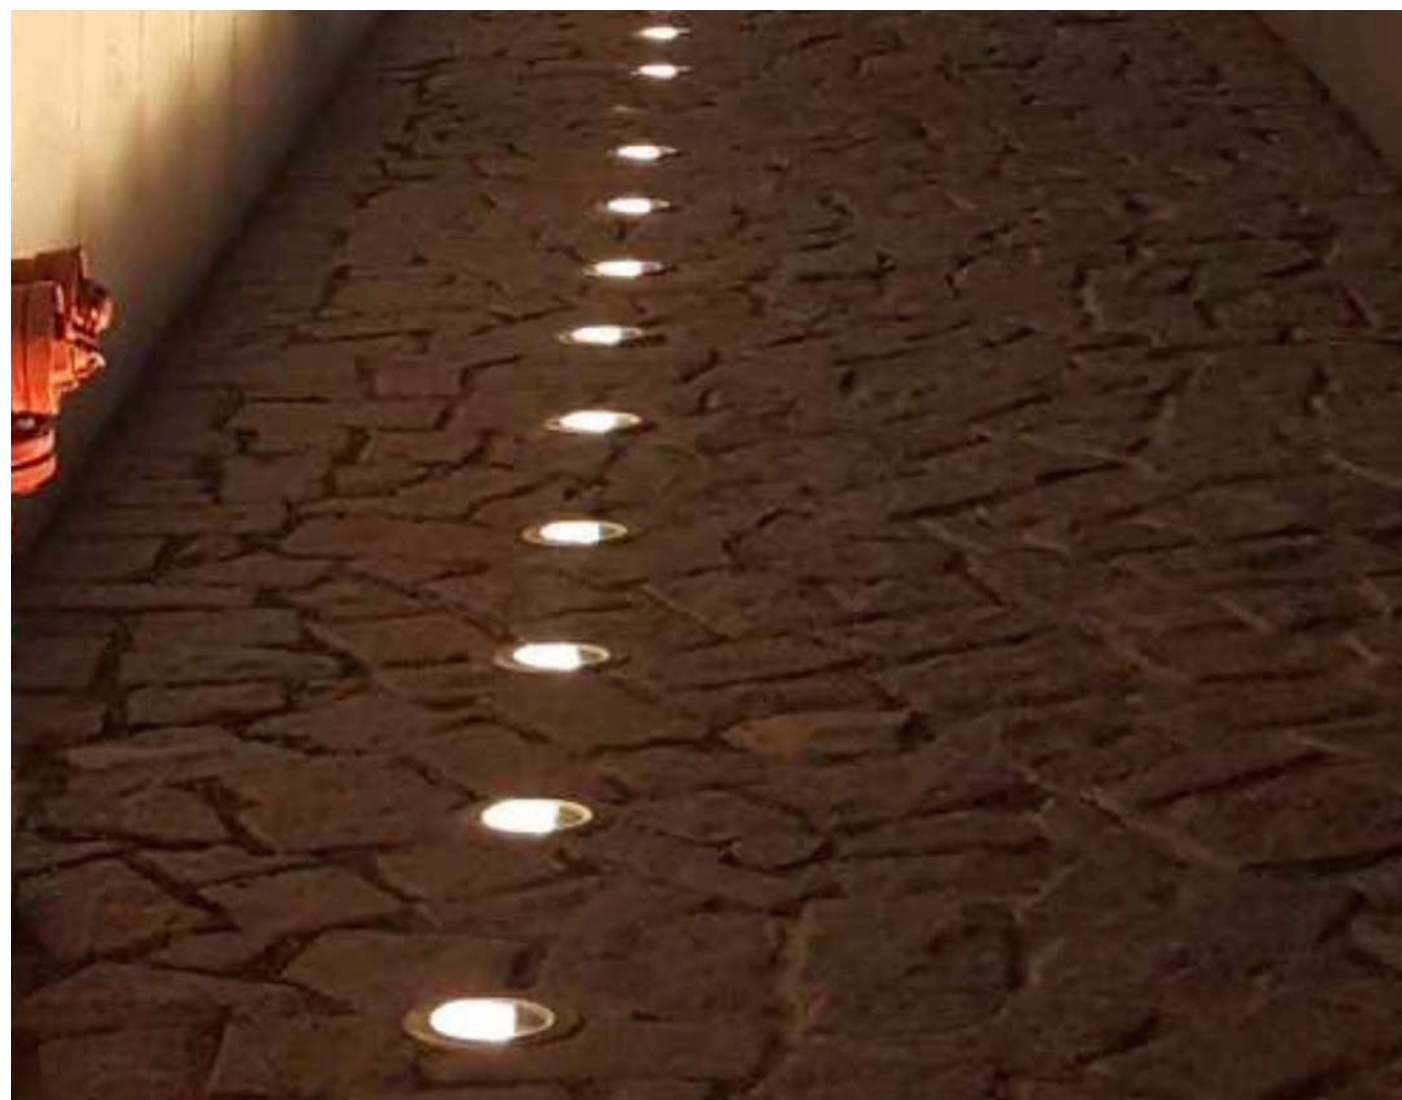



U5

2200K



ref. U5

Negro/Black

2200K

LED 20W

Ø85x130mm

IP65

CRI80+

220-240V



U6

2200K



ref. U6

Negro/Black

2200K

LED 5W

Ø100mm (cut out 95mm)

IP68

CRI80+

220-240V

U6

2200K

ref. U6 Neón Led

Silicona

2200K

LED 12W/mt

15x15mm

IP67

CRI90

220-240V



U7

2200K



ref. Tira de led

Blanco extra cálido

2200K

LED 12W

18x15mm

IP67

CRI90

220-240V

www.luzdifusion.com

LUZ

DIFUSION

Berti Barcelona S.L.
Lope de Vega 29
08191 Rubí (Barcelona) SPAIN
T. +34-936970088
www.luzdifusion.com
export@luzdifusion.com